PANEL DESCRIPTION: EXISTING

MOUNTING: SURFACE | VOLTS: 120/208
M.L.O.: EXIST. | PHASES: 3
MAINS: 225A M.B. | WIRES: 4

SERVING	CKT #	LOAD CONN.	LOAD DEM.	BKR AMP.	WIRE	COND.	PHASE A	PHASE B	PHASE C	COND.	WIRE	BKR AMP.	LOAD CONN.	LOAD DEM.	CKT #	SERVING
NEW TRK. LTS.	1	1130	70	3-12	3/4"					3/4"	3-12	20	1824		2	NEW LIGHTS
NEW TRK. LTS.	3	1875	70	3-12	3/4"					3/4"	3-12	20	1500		4	EXIST. FLUOR.
NEW TRK. LTS.	5	938	70	3-12	3/4"					3/4"	3-12	20	1700		6	EXIST. FLUOR/TRK
NEW TRK. LTS.	7	1393	70	3-12	1/2"					3/4"	3-12	20	1500		8	NEW TRK. LTS.
NEW TRK. LTS.	9	1318	70	3-12	1/2"					3/4"	3-12	20	1500		10	NEW TRK. LTS.
NEW TRK. LTS.	11	1312	70	3-12	3/4"					3/4"	3-12	20	1500		12	NEW TRK. LTS.
NEW TRK. LTS.	13	750	70	3-12	3/4"					3/4"	3-12	20	1500		14	NEW TRK. LTS.
NEW TRK. LTS.	15	1406	70	3-12	3/4"					3/4"	3-12	20	1500		16	NEW TRK. LTS.
NEW TRK. LTS.	17	1312	70	3-12	3/4"					3/4"	3-12	20	1500		18	NEW TRK. LTS.
NEW TRK. LTS.	19	938	70	3-12	3/4"					3/4"	3-12	20	900		20	NEW TRK. LTS.
NEW TRK. LTS.	21	1312	70	3-12	3/4"					3/4"	3-12	20	1200		22	NEW TRK. LTS.
SPARE, TRK. LTS.	23	1625	70	3-12	1/2"					3/4"	3-12	20	1800		24	EXIST. FLUOR.
SPARE, TRK. LTS.	25	1687	70	3-12	1/2"					-	-	20	900		26	SPARE
SPARE, TRK. LTS.	27	1875	70	3-12	1/2"					-	-	20	-		28	SPARE
SPARE, TRK. LTS.	29	1750	70	3-12	1/2"					-	-	20	-		30	SPARE
SPARE	31	-	20	-	-					-	-	20	-		32	SPARE
	33														34	
	35														36	
	37														38	
	39														40	
	41														42	

DEMAND LOADS: PHASE A= 12.49K | PHASE B= 16.54K | PHASE C= 13.13K | TOTAL LOAD: 51.2 KVA, 115 AMPS

NOTES:

PANEL DESCRIPTION: B (NEW) S.O.P.DCCENTER

MOUNTING: SURFACE | VOLTS: 120/208
M.L.O.: 100A M.B. | PHASES: 3
MAINS: | WIRES: 4


SERVING	CKT #	LOAD CONN.	LOAD DEM.	BKR AMP.	WIRE	COND.	PHASE A	PHASE B	PHASE C	COND.	WIRE	BKR AMP.	LOAD CONN.	LOAD DEM.	CKT #	SERVING
RECEPT. (LOL)	1	900		20	3-12	1/2"				1/2"	3-12	20	600		2	EXTERIOR LTS
RECEPT. (LOL)	3	1485		20	3-12	1/2"				1/2"	3-12	20	1200		4	BROTHER'S SIGN
EXIST. CKTS.	5	600		20	EXIST	EXIST				1/2"	3-12	20	600		6	HEV. RECEPT.
EXIST. CKTS.	7	600		20	EXIST	EXIST				1/2"	3-12	20	600		8	HEV. RECEPT.
EXIST. CKTS.	9	600		20	EXIST	EXIST				1/2"	3-12	20	180		10	HEV. SMOKE DET.
EXIST. CKTS.	11	600		20	EXIST	EXIST				-	-	20			12	SPARE
EXIST. CKTS.	13	600		20	EXIST	EXIST				-	-	20			14	SPARE
EXIST. CKTS.	15	600		20	EXIST	EXIST				-	-	20			16	SPARE
EXIST. CKTS.	17	600		20	EXIST	EXIST				-	-	20			18	SPARE
EXIST. CKTS.	19	600		20	EXIST	EXIST				-	-	20			20	SPARE
EXIST. CKTS.	21	600		20	EXIST	EXIST				-	-	20			22	SPARE
	23														24	
	25														26	
	27														28	
	29														30	
	31														32	
	33														34	
	35														36	
	37														38	
	39														40	
	41														42	

DEMAND LOADS: PHASE A= 3.4K | PHASE B= 4.0K | PHASE C= 2.8K | TOTAL LOAD: 10.3 KVA, 29 AMPS

NOTES:

ELECTRICAL NOTES:

1. EXIST. 20AMP 125V DUPLEX RECEPTACLE TO REMAIN.
2. EXIST. 20AMP 250V DUPLEX RECEPTACLE TO BE RELOCATED TO ACCOMMODATE RENOVATIONS. PROVIDE SURFACE J.B. @ EXIST. BACKBOX & EXTEND 3-#12 CU IN 1/2"EMT TO NEW RECEPTACLE LOCATION INDICATED.
3. MAKE CONNECTION TO LINUM FIXTURES IN DISPLAY CASE. MOUNT TOGGLE SWITCH ON NEW FACIA OF MILLWORK 24" ABOVE RAISED FLOOR.
4. EXIST. DEVICE TO BE ABANDONED. (POWER CKT. TO REMAIN CONTINUOUS.)
5. HOMERUN 3-#12 CU IN 1/2" EMT TO NEW PANELBOARD. PROVIDE NEW 20A 1P C/B.
6. RUN BELOW RAISED ACCESS FLOOR.
7. EXIST. BURGLAR ALARM EQUIP. TO BE DISCONNECTED & REMOVED. COORDINATE W/OWNER AND PRESENT ALARM SERVICE.
8. EXIST. 225A 120/208V 3ϕ 4W PANELBOARD.
9. NEW SURFACE MOUNTED RECEPTACLE (MOUNTED HORIZONTALLY) ABOVE NEW PLATFORM - CIRCUIT TO TIMER #1.
10. PROVIDE & INSTALL NEW COMMUNICATION CABLE FROM ACTIVE CASH REGISTER THIS LOCATION TO EXIST. CASH REGIST. COUNTER @ ADJACENT SALES AREA. NEW CABLE SHALL BE ANIXTER 1424 OGA T2800 300V RL. EXIST. FACILITY HAS 3/4" C RUN BELOW SLAB FROM TEL. BKBD TO CASH REGIST. COUNTER. SAID CONDUIT CONTAINS 1-50 PAIR TEL. CABLE & 1 COMPUTER CABLE. THE 50 PAIR TEL. CABLE SHALL BE REMOVED & REPLACED W/A 25 PAIR TO ALLOW INSTALLATION OF THE ADDITIONAL BELDEN CABLES. COORD. W/OWNER FOR ROUTING OF BELDEN CABLE THROUGH NEW FACILITY.

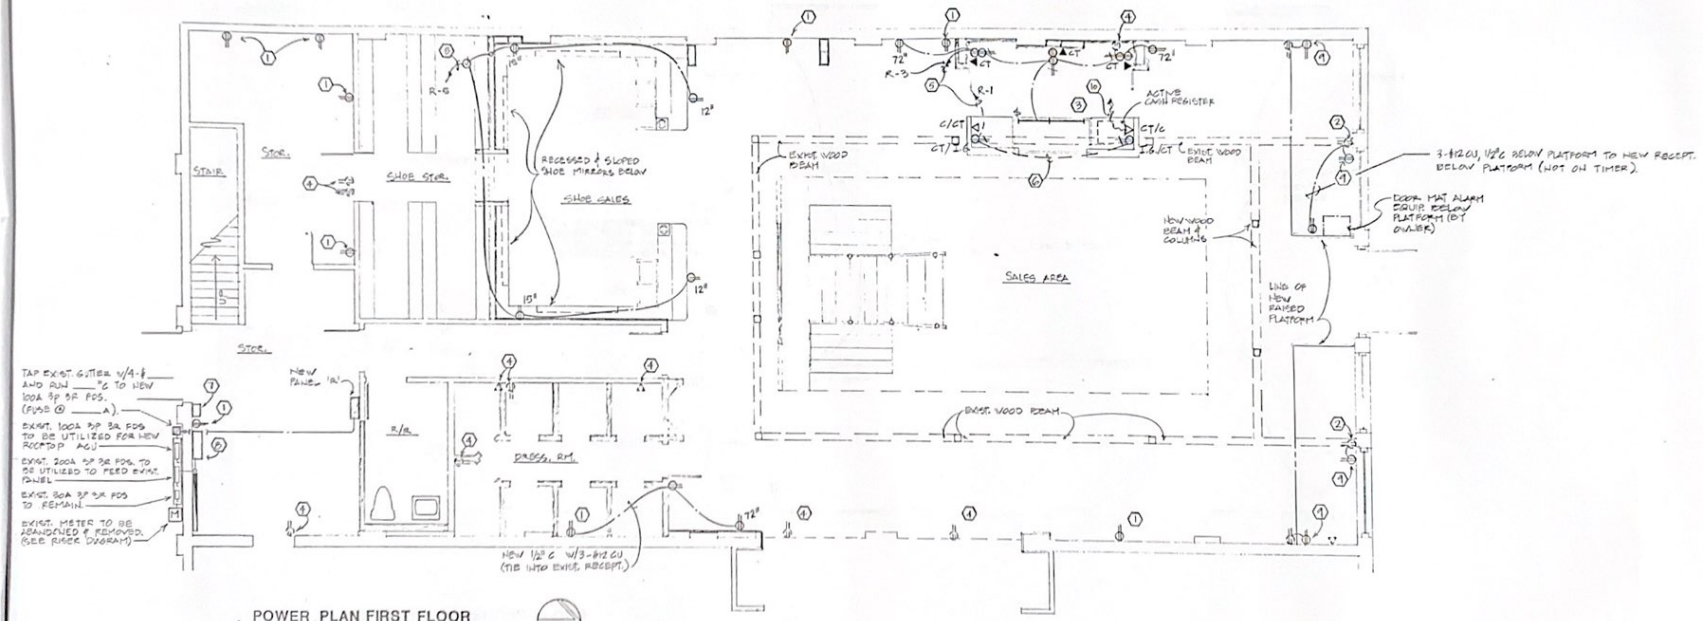

POWER PLAN FIRST FLOOR
SCALE: 1/4" = 1'-0"

PLAN NORTH

STATE OF LOUISIANA
KEITH L. ANDERSON
REG. No. 7188
REGISTERED PROFESSIONAL ENGINEER
Electrical

TERRY GAUDET & ASSOCIATES, INC.
LAFAYETTE, LOUISIANA
LAKE CHARLES, LOUISIANA
PROJECT No. 93-17

GOSSEN ARCHITECTS
A PROFESSIONAL CORPORATION

drawn by: MEH
date: JUNE 1993

project: RESTROOMS - TENANT IMPROVEMENTS
number: 93-005

E3
10 of 11